



XLT 3855-TS3 Quiet Fire
Natural Gas or
Liquid Propane



PO Box 9090 Wichita, KS 67277-0090
P: 1-316-943-2751 F: 1-316-943-2769
www.xltovens.com



Simple. Smart.

XLT 3855-TS3 Quiet Fire Gas Conveyor Oven

Are you looking for an affordable solution for your cooking needs?

XLT AVI Hood
Available in all oven sizes



In our continuing pursuit of excellence in **XLT** ovens, we now produce our own, Quiet Fire™ burner. It utilizes state-of-the-art design and components to provide the ultimate in combustion, with a perfect balance between gas and combustion air. The resulting flame is pure and efficient, with lower CO2 emissions and up to 35% in fuel savings. And with our Simple Smart design, the unit needs no forced air fan, thus providing much quieter operation, while heat transfer and bake speed are improved.


FEATURES

- The **XLT-3855-TS3 Quiet Fire** is available in three configurations, the single, the double, and the triple stack models.
- The optional front sandwich door is provided to load or unload product for different cook times.
- Both exterior AND INTERIOR exposed surfaces are made of easy cleaning stainless steel.
- **XLT™** ovens are manufactured with pride in the USA under stringent quality standards.
- Replacement parts are readily available through the **XLT** Fast Parts Program at a fraction of the cost of our competitors.
- The large removable front panel allows for easy access to oven interior, making cleaning much easier than our competitors' ovens of the same size.
- All **XLT™** ovens are 100% factory tested with a minimum 4-hour burn-in time.
- The conveyors can be set up to move either right-to-left or left-to-right.
- Industry leading limited 5-year warranty.

XLT™ ovens are an improved combustion flue-less design and are more efficient than comparable ovens. All ducts, crumb trays, and the conveyor are readily removable for easy cleaning. An overhead ventilation hood is required. All **XLT** ovens are available with custom fitted AVI hood systems for the most efficient and comfortable ventilation package in the industry. 120 Volt electrical power does not require an expensive electrician to install, simply plug into an available outlet. The gas connections require a licensed plumber. All fuses are EXTERNALLY panel-mounted allowing easy troubleshooting.



LAYOUT AND DIMENSIONS

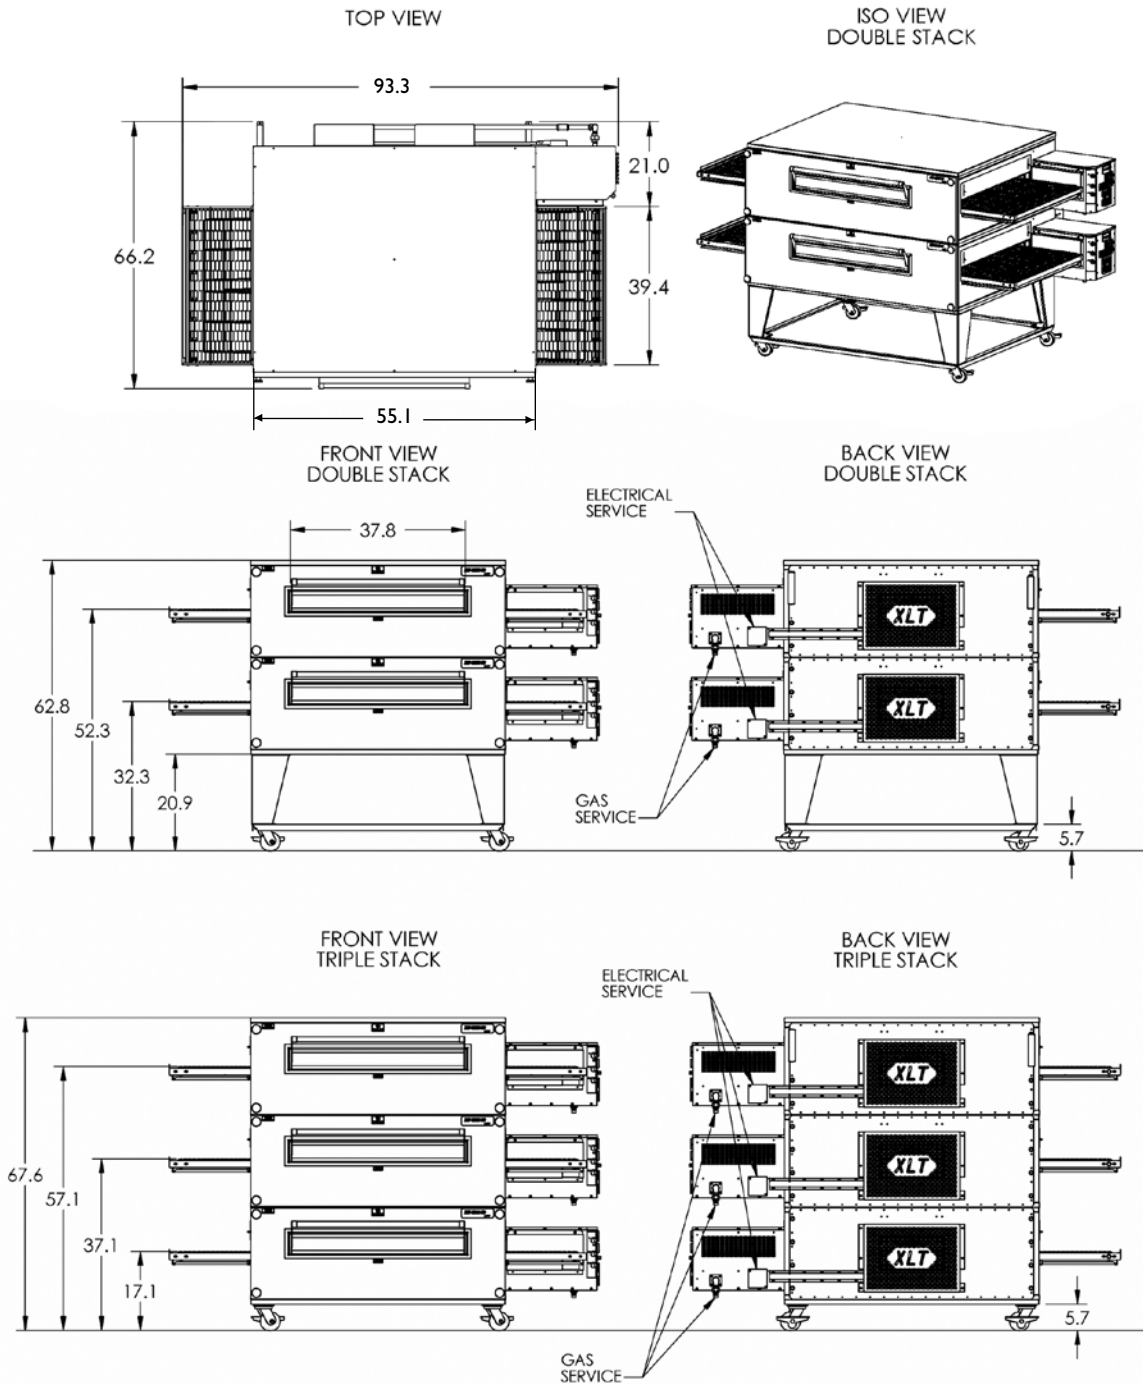

PO Box 9090
 Wichita, KS 67277-0090

P: 1-316-943-2751
 F: 1-316-943-2769
www.xltovens.com

XLT
O V E N S
 Simple. Smart.

SPECIFICATIONS

XLT 3855-TS3 Quiet Fire

Electrical Requirements:

| | Voltage (AC) | Phase | HZ | Amps |
|--------------|--------------|-------|----|------|
| Single Oven | 120 | 1 | 60 | 6.0 |
| Double Stack | 120 | 1 | 60 | 12.0 |
| Triple Stack | 120 | 1 | 60 | 18.0 |

Natural Gas Requirements:

| | Burner Capacity BTU/hr (Max) | Gas Supply Pressure Inches, Water Column | Gas Pipe Size (NPT) |
|--------------|---------------------------------|---------------------------------------------|------------------------|
| Single Oven | 150,000 | 8-14 | 1-1/2" |
| Double Stack | 300,000 | 8-14 | 1-1/2" |
| Triple Stack | 450,000 | 8-14 | 1-1/2" |

Or Optional Propane Gas Requirements:

| | Burner Capacity BTU/hr (Max) | Gas Supply Pressure Inches, Water Column | Gas Pipe Size (NPT) |
|--------------|---------------------------------|---------------------------------------------|------------------------|
| Single Oven | 150,000 | 11.5-14 | 1-1/2" |
| Double Stack | 300,000 | 11.5-14 | 1-1/2" |
| Triple Stack | 450,000 | 11.5-14 | 1-1/2" |

General Information:

| Belt Width | Bake Time Ranges* | Max Temperature | Conveyor Opening Height (Max) | Ship Weight Per Oven |
|------------|-------------------|-----------------|-------------------------------|----------------------|
| 32.0" | 4 min-10 min | 550°F | 3" | 900 lbs. |

* Adjustments can be made for other bake time ranges. Specifications and dimensions are subject to change without notice. Local codes and regulations may also apply.

Options:

- Stainless steel sandwich door handle
 - 4" conveyor opening height
 - Stainless steel handle
 - Solid fronts
 - Product shelves
 - Product slides
 - Split belts
 - Perforated crumb trays
- All XLT ovens available with custom fitted AVI hood systems for the most efficient and comfortable ventilation package in the industry.



Simple. Smart.

PO Box 9090 Wichita, KS 67277-0090
 P: 1-316-943-2751 F: 1-316-943-2769
www.xltovens.com

